

SCREEN DRYING CABINETS DRI-VAULT

10 or 24 Screen Drying Cabinets

\$3,740*

- RELIABLE** 3 Year Warranty
- HEAVY DUTY** Industrial stainless steel finned heater
- CAPACITY** Holds up to ten (10) 24" x 34" (61 x 86 cm) or twenty four (24) 25" x 36" (63.6 x 91.4 cm) wood, aluminum or retensionable screens
- POWERFUL** One (1) 200 CFM (5.7 CMM) air flow blower or Two (2) 250 CFM (14.2 CMM) air flow blowers
- CONSISTENT** Pressurized cabin with positive air flow keeps out contaminants even if an air leak occurs
- EFFECTIVE** Screens sit horizontal on removable shelves (angled to provide edge contact only)
- SECURE** One (1) sealed latching door or two (2) individually sealed latching doors
- CONTROL** 10 screen cabinet has breaker on/off switch & pilot light or 24 screen cabinet has breaker on/off switch, pilot light, digital temperature control & ability to run air only or controlled heat
- FAST** Dries emulsion as quickly as 20 minutes
- EFFICIENT** 4" (10 cm) exhaust duct for contaminated air removal
- PRECISE** Light tight heavy duty double wall
- EASY** Simple to clean or replace filtered air intake

- ### Options
- Stainless steel shelves for rustproof drying
 - Casters (standard on 24 screen cabinet)
 - 240 Volt (standard on 24 screen cabinet)

\$1,750*

E2227 exposure unit fits perfectly on top of 10 screen drying cabinet to save space.




VDC-243410
10 Screen Drying Cabinet
(shown with optional casters)



VDC-253624
24 Screen Drying Cabinet

3 YEAR WARRANTY

Dynamic Air Flow above and below the screens ensures consistent & even drying.

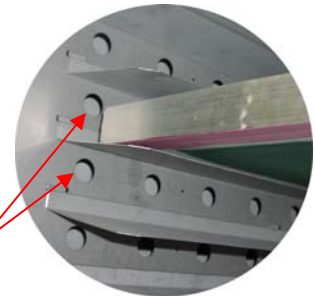


*Starting List Price (USD). Price does **NOT** include crating and shipping charges.
6% sales tax will be added for PA billing addresses. Prices subject to change without notice.



Dri-Vault Drying Cabinets Technical Specifications

Ever wonder why you have pinholes or debris in the emulsion on your screens? Have multiple jobs to do but are wasting time waiting for your screens to dry? Is your emulsion activating before you even get to burn your screens? If so, you need the Dri-Vault!

The Dri-Vault provides a safe environment to, not only dry your screens in a timely fashion, but it's powerful pressurized air flow system keeps contaminants off your screens and the double-wall sealed environment prevents UV light from leaking in and activating your emulsion.

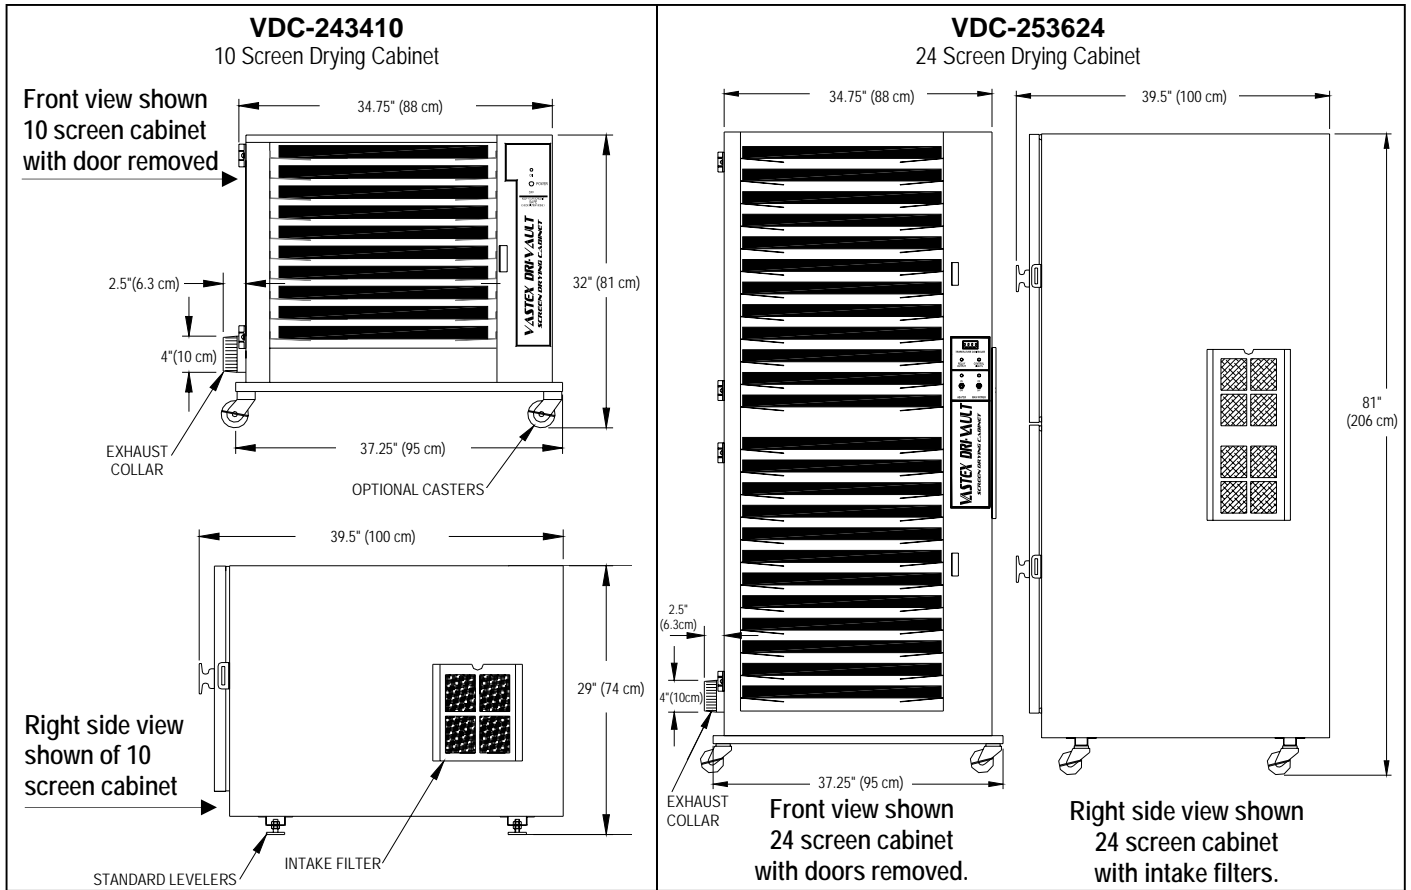

	VDC-243410	VDC-253624
Defect Warranty	3 Year	3 Year
Maximum # of Screens	10 @ maximum size	24 @ maximum size
Maximum Screen Size	24" x 34" x 1.625" (61 x 86 x 4.12 cm)	25" x 36" x 2.25" (63.5 x 91.4 x 5.7 cm)
Smallest Screen Width	18" (46 cm)	18" (46 cm)
Blower (Free Air)	200 CFM (5.7 CMM)	500 CFM (14.2 CMM)
Overall Depth	39.5" (100 cm)	39.5" (100 cm)
Overall Width	34.75" (88 cm)	34.75" (88 cm)
Overall Height	29" (74 cm) / 32" (81 cm) w/ optional casters	81" (206 cm)
Heater Wattage	1,250 Watts 120 Volts or 1,550 Watts 240 Volts	2 x 1,550 = 3,100 Watts 240 Volts
Electrical Power	120V / 10A / 1 Ph. / 60 HZ / NEMA 5-15P plug or 240V / 6A / 1 Ph. / 50/60 HZ / NEMA 6-15P plug	240V / 16A / 1 Ph. / 50/60 HZ / NEMA 6-20P plug
Shipping Weight*	305 lbs (138.3 kg)	668 lbs (303 kg)
Shipping Dimensions*	45" x 43" x 36" [114 x 109 x 91 cm]	44" x 44" x 82" [112 x 112 x 208 cm]

*All shipping weights and dimensions are for continental US shipping only. Call for other shipping specifications. Ex-works from Allentown PA.



Toll Free: 1.800.482.7839
1.800.4VASTEX